

TEKSKIL Prompter Monitor Conversion

Tekskil Prompter upgrade guide

CRT prompter monitors are dim, power-hungry and heavy. Tekskil's LCD upgrades are an excellent way to revitalize a legacy system and provide the talent with a crisp, bright prompting display.

Tekskil LCD monitors feature integrated power and signal management, temperature controls, twin cooling fans, and robust construction.

They are the highest quality displays available


Proudly built in North America



A Start by removing the old CRT. There are 2 thumbscrews to unscrew - they can be used to mount the new display.



B Remove both CRT support arms - these are fastened from the back with allen head screws.

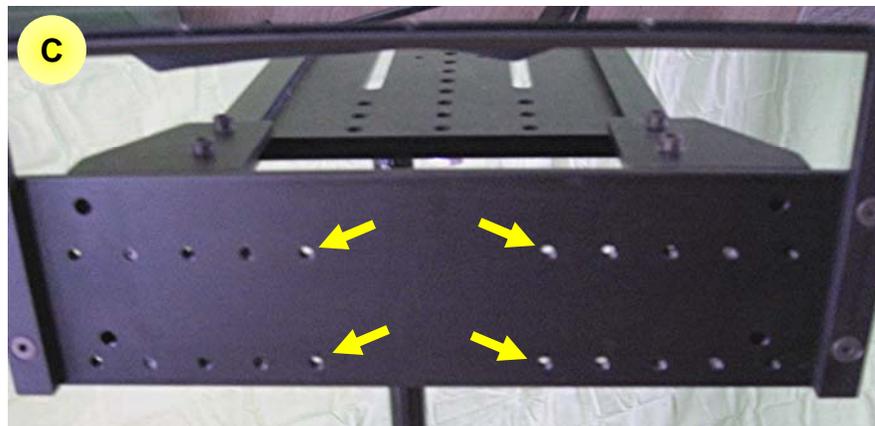

C Use a 1/4" drill bit to clear the threads from the four centermost holes in the backplate - these are the mounting holes for the new LCD display.



D Connect the new LCD to the backplate with thumbscrews or the supplied conversion hardware



Your new Tekskil display is set to go!

Comments or questions?

Call us at 877-Tekskil or email Tekskilprompters2011@Tekskil.com