



TEKSKIL 15 inch DBC Prompters

Boost production quality with these high performance Robotic Prompters featuring Tekskil's Dynamic Balancing Cradle

A perfect companion for the new generation of lightweight Broadcast Pan & Tilt Systems




Don't settle for undersized prompters on your lightweight pan and tilts. Mounting a full-size display is as simple as getting rid of the counterweights and solving the balance problem.

Tekskil's light robotic solution features professional grade 15" LCD heads which are comfortably viewed from 20+ feet away, even under bright studio lights. The prompting panel feature a supercharged LCD for maximum contrast and resolution. Tekskil's ultralight 15R Series integrates perfectly with today's smaller, lighter cameras and pan & tilt heads – no more issues with overloading or balancing the pan/tilt unit. Our purpose-built robotic prompter system is comprised of light, strong

aluminum components, micro-truss supports and our exclusive Dynamic Balance Cradle - Tekskil's benchmark design and engineering.

The DBC enables precise, rapid alignment of the camera & prompter payload with pan/tilt's axis of rotation. This eliminates camera 'lurching' and unnecessary strain on the pan/tilt motors and bearings. Installation is a snap, no more frustration with trial and error balancing. Tekskil supplies install ready mounts for most brands of Pan & Tilts. Currently this includes Cambotics, Telemetrics, Panasonic and Fujinon – other models are supported on request.

Many broadcast studios are realizing the benefits of prompter-mounted Robotic Camera systems. The 15R Series is the benchmark for performance and quality. Compare features, construction and value with other manufacturers - Tekskil's quality, ease of use and affordability make these products the best choice for all your prompting needs.

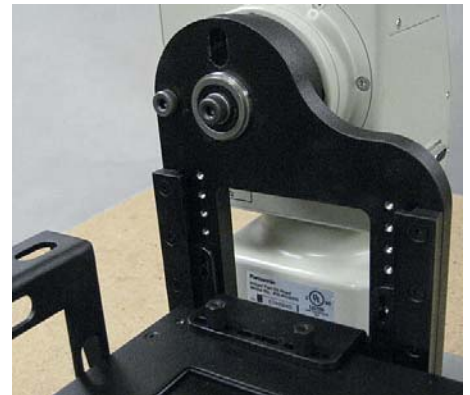

Close-up of the Dynamic Balancing Cradle shows two-axis adjustability for setting exact dynamic balance throughout the tilt range

Specifications:

	15R	15RP
LCD Panel Type:	High Brite Active Matrix TFT	High Brite Active Matrix TFT w/ LED Backlights
Active Screen Size (H x V):	15.0 inches Diagonal (12.0" x 9.0")	15.0 inches Diagonal (12.0" x 9.0")
Pixel Format (RGB):	1024 x 768 (Native Resolution)	1280 x 1024 (Native Resolution)
Video Inputs:	Composite and XGA	Composite and XGA
Backlight Brightness:	600+ cd/m ² (nits)	1400 cd/m ² (nits)
Standards Format:	NTSC or PAL (auto-selected)	NTSC or PAL (auto-selected)
Contrast Ratio:	600:1	1000:1
Color Temperature:	6500°K, 8500°K	6500°K, 8500°K
Viewing Angle (H / V):	140° / 120°	170° / 170°
Panel Weight:	7.0 lbs	7.0 lbs
Lamp Life:	30,000-Hour	60,000-Hour
Power Consumption DC:	36 Watts (12VDC)	28 Watts (12VDC)
Warranty:	One Year	Five Years

Features of the 15R Series:

- High brightness and contrast display
- Low reflectance imaging
- Slim light weight metal cabinet with robust truss mounts for correct, vibration free operation
- Custom Dynamic Balance Cradle for each Pan & Tilt Drive ensures alignment of Center of Gravity with pan/tilt axis

Set up one of our systems in your studio and see the difference for yourself

Tekskil Industries, Inc.

Toll Free 877-TEKSKIL (835-7545)
Visit our website at Tekskil.com

Toll Free Fax: 877-576-8361
Email: TekskilPrompters2011@tekstil.com