

# Panasonic


## Prompter Selection Guide

877-TEKSKIL  
Tekskil.com

**AW-PH400**  
Load: 17.6 lbs.



**AW-PH405**  
Load: 33 lbs.

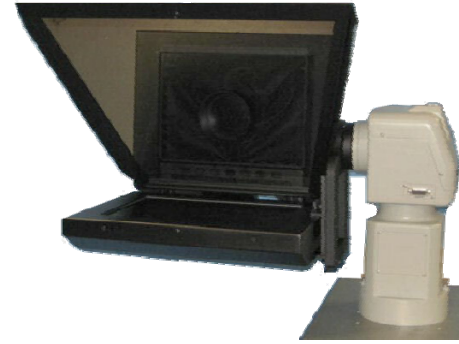

Specifications	10R Prompter	15R Prompter	15PR Prompter	17R Prompter	17PR Prompter
	Brightness (cd/m <sup>2</sup> )	1200	600	1200	600
Contrast Ratio	1000	600	1000	600	1000
Power Consumption (12 VDC)	18 Watts	32 Watts	24 Watts	35 Watts	28 Watts
Panel Weight	4.5 lbs.	7 lbs.	7 lbs.	9 lbs.	9 lbs.
Warranty	5 Years	1 Year	5 Years	1 Year	5 Years
<b>Beamsplitters</b>					
Standard 4:3 lens	✓	--	--	--	--
Wide Angle 16:9 HD lens	✓	✓	✓	✓	✓
<b>Tally Option</b>					
Front mount single-stage LED cluster	✓	✓	✓	✓	✓
Top mount dual-stage LED bars & CAM #	--	✓	✓	✓	✓
<b>Timing Option</b>					
6 digit VITC SMPTE clock, 2.3" high LEDs	--	✓	✓	✓	✓

Prompter Options

Tekskil Displays feature: Sophisticated power management to prevent image distortion, electrical noise and display damage  
Signal conditioning to eliminate ground loops and drop-outs  
Temperature control elements, including twin cooling fans to prevent image loss, back light failure and circuitry overheats

Tekskil Prompting Systems feature: Integrated stabilization and dampening elements to minimize vibration and lurching during camera movement  
Micro-truss construction provides optimal strength, balance and weight for **greatly** reduced pan/tilt servo stress and failure