




TEKSKIL D98 SD/HD/3G-SDI to HDMI & AV Converter

Boost production quality with this Auxiliary Display Video Converter

A perfect companion for the new generation of Consumer Television Monitors

A wide screen Aux Display will make life easier for your on-screen talent and production crew. Many broadcast studios are realizing the benefits of teleprompter-mounted Auxiliary/Talent Assist Displays - secondary screens are a great way to share remote feeds and on-air cueing with the talent. Server feeds, Chromakeys, and over-the-shoulder inserts are readily visible without losing eye contact with the camera. Tekskil's LCD-22A-VHD mounts perfectly with today's smaller, lighter cameras & pan/tilt heads – no problems with overloading or balancing your camera system. However, the display is only provided with an HDMI Video Input and the studio infrastructure is typically 3G/HD-SDI. The D98 mounts to the TV Monitor Aux Bracket. Mounted at the optimum position and angle underneath the prompter with a stabilized micro-truss support is just another example of Tekskil's benchmark design and engineering. Our custom hardware enables mounting to any Tekskil Pro or Premium Series Studio Prompters. An optional Dynamic Stabilization Arm is available for the most demanding Robotic or Studio applications

Your talent will appreciate the added production support provided by auxiliary displays. These High Definition 22" LCD units are comfortably viewed from 25+ feet away. The D36 (22A-VHD) and D98 are an extremely cost-effective addition to the camera platform. Compare features, construction and value with other manufacturers - Tekskil's quality, ease of use and affordability make our prompting systems the best choice for all your prompting needs.

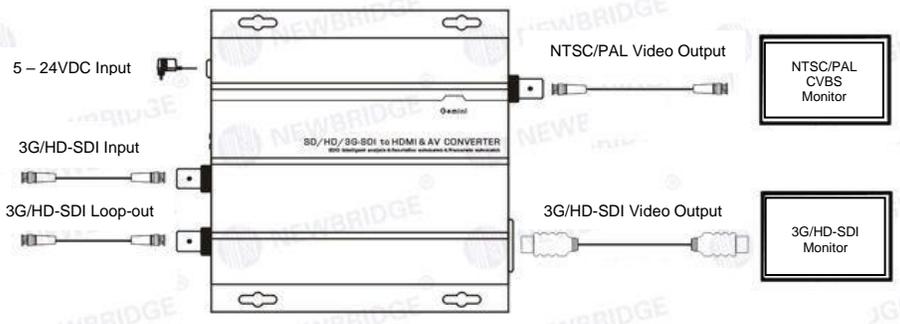

The D98 SD/HD/3G-SDI to HDMI & AV (CVBS) Converter converts a single channel SDI signal to different kinds of HD Multimedia HDMI signals and CVBS signals. It integrates an SDI Cable equalizer and reclocker to enhance video performance and stability.

- Supports all SDI input formats:
 - SD: 525i@59.94Hz, 625i@50Hz
 - HD: 720p@23.98Hz, /24Hz, /25Hz, /29.97Hz, /30Hz
 - 720p@50Hz, /59.94Hz, /60Hz
 - 1080i@50Hz, /59.94Hz, /60Hz
 - 1080p@23.98Hz, /24Hz/ 25Hz/29.97Hz/ 30Hz
 - 3G: 1080p@50Hz, /59.94Hz, /60Hz
- Support SMPTE 259M-C, SMPTE 292M, SMPTE 424M, SMPTE 425M (A level and B level),. Low reflectance imaging
- Slim light weight cabinet with robust truss mount for correct, secure positioning
- User selectable output format (HDMI/CVBS)

Set up one of our systems in your studio and see the difference for yourself

Tekskil Industries, Inc.

Phone: 604-985-2250
Visit our website at Tekskil.com

Toll Free 877-TEKSKIL (835-7545)

Toll Free Fax: 877-576-8361
Email: Team@tekstil.com