




Tekskil SelectVIEW 19S Studio Prompters

Always have the right size prompt display With Tekskil's Instant-Scaling Prompter Display

SelectVIEW prompting heads are a great solution for stations who want to get the best production support from their prompting systems – these are the **only** prompter displays that instantly scale from 15" to 19". Use the smaller modes to avoid 'shifty eyes' and ensure optimum eye contact on close shoots. Use the larger modes to deliver perfect readability for longer shots (or for talent with challenged eyesight).

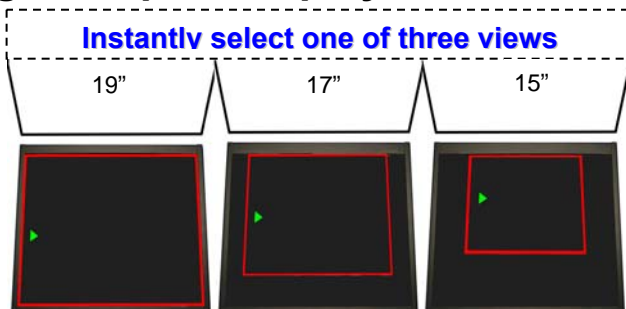

Reliability: The SelectVIEW monitors incorporate a high bright LED backlit display with twin cooling fans and DC power management, all housed in a rugged extruded aluminum enclosure.

Installation: Our innovative modular construction enables you to configure your prompter as an outdoor broadcasting system, or an indoor studio configuration. Three different beamsplitter configurations, three rail lengths and multiple camera risers will tailor fit any camera and lens, no matter what!

Features: Enhanced contrast and panel brightness provide a crisp, easy to read talent display. Three image sizes – 15", 17" and 19" with push button ease from a built-in custom scaler. An optional HD-SDI video input is available. Dynamically stabilized and dampened beamsplitters eliminate lens shutter and screen shake resulting from aggressive pan/tilts or overly exuberant camera operators. Talent Assist/Aux displays are also treated to vibration control by a robust truss assembly and dynamically tensioned arm. Add our TallyCAM display or TallyCLOCK to complete your system.



19SE-HD with H30 wide angle Hood And 22" Talent Assist/Aux Monitor

Cost: SelectVIEW prompting monitors are half the cost (or less) of those lower performance displays offered by other manufacturers – and the warranty is second to none.

SelectVIEW Specifications	19SE Performance Series	19SP Premium Series
Diagonal Screen Size (H x V):	19 inches (14.8" x 11.9")	19 inches (14.8" x 11.9")
Pixel Format (RGB):	1280 x 1024 (Native)	1280 x 1024 (Native)
LED Backlight Brightness:	700 cd/m ² (≈ 700 Nits)	1000 cd/m ² (≈ 1000 Nits)
Contrast Ratio:	2000:1	2000:1
Viewing Angle (H/V):	150° / 150° minimum	150° / 150° minimum
Video (CVBS) Input:	BNC (x1)	BNC (x1)
Display Weight:	14.0 lbs.	14.0 lbs.
System Weight with ST Hood:	43.0 lbs.	43.0 lbs.
LED Lamp Life:	60,000+ hours	60,000+ hours
12 VDC Input:	XLR 4-Pin Male	XLR 4-Pin Male
Power Consumption:	44 Watts at full brightness	47 Watts at full brightness
Warranty:	3 Years	5 Years

Contact us to arrange a no-pressure trial in your facility.

Proudly made in North America for more than 30 years

Tekskil Industries, Inc.

Phone: 604-985-2250
Website: Tekskil.com

Toll Free: 877-TEKSKIL (835-7545)

Toll Free Fax: 877 576-8361
Email: Team@tekstil.com