



Tekskil Basic Series Aux Displays

Boost production quality with these HD auxiliary displays
A perfect companion for the new generation of Prompter Systems



This wide screen Aux Display will make life easier for your on-screen talent and production crew. Tekskil's 19B-A and 22B-A mount perfectly with today's smaller, lighter cameras & pan/tilt heads – no problems with overloading or balancing your camera system. The display is mounted at the optimum position and angle underneath the prompter with micro-truss supports - Tekskil's benchmark design and engineering. Our custom hardware enables mounting to any Tekskil Pro or Premium Series Studio Prompters.



19B-A

22B-A


Many broadcast studios are realizing the benefits of prompter-mounted Auxiliary Displays - secondary screens are a great way to share remote feeds and on-air cueing with the talent. Server feeds, Chromakeys, and over-the-shoulder inserts are readily visible without losing eye contact with the camera. Your talent will appreciate the added production support provided by auxiliary displays. These High Definition LED Backlit LCD units are comfortably viewed from 25+ feet away. These are an extremely cost-effective addition to the camera platform. Compare features, construction and value with other manufacturers - Tekskil's quality, ease of use and affordability make our prompting systems the best choice for all your prompting needs.

V

Compare Tekskil's stabilized rigid truss design with the competitions articulated arms. What do you want suspending your Talent Assist/Aux Panels?

Features of the 19 and 22 inch Aux

- Edge lit **LED** Backlight Technology
- Low reflectance imaging
- Slim light weight cabinet with robust truss mounts for correct, secure positioning
- 16 x 9 Aspect Ratio
- Side Bar, Zoom and Stretch Modes
- Very low power consumption
- 12 Volt DC Operation

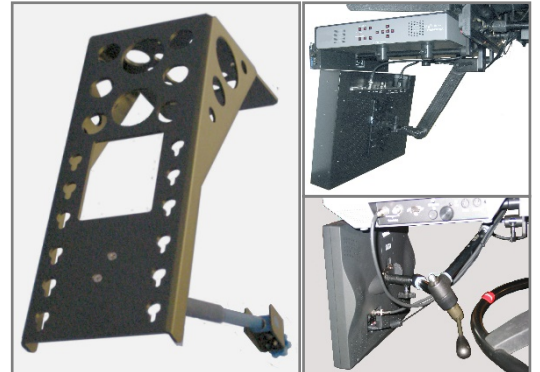

Specifications

| | 19B-A (TA35) | 22B-A (TA36) |
|-----------------------------|--------------------------------|---------------------------------|
| Panel Type: | Active Matrix TFT LCD | Active Matrix TFT LCD |
| Active Screen Size | 18 1/2 inches Diagonal | 21 1/2 inches Diagonal |
| Pixel Format (RGB): | 1366 x 768 (Native Resolution) | 1920 x 1080 (Native Resolution) |
| High Definition Inputs: | HDMI & Component Video Y/Pr/Pb | HDMI & Component Video Y/Pr/Pb |
| Standard Definition Inputs: | Composite & 'S' Video | Composite & 'S' Video |
| Contrast Ratio: | 20,000:1 | 20,000:1 |
| HDTV Resolutions: | 720P 1080i @120Hz | 720P 1080i 1080P @120Hz |
| Response Time: | 5 msec | 5 msec |
| Viewing Angle (H / V): | 170° / 160° | 170° / 160° |
| Panel Weight: | 7.2 lbs | 7.5 lbs |
| LED Lamp Life: | 50,000-Hour | 50,000-Hour |
| Power Consumption: | 28 Watts (120 VAC) | 42 Watts (120 VAC) |

Need SDI Inputs?

D98 3G/HD/SD-SDI to HDMI Mini Converter



Economical Mini SDI to HDMI video converter allows you to easily connect HDMI displays to SDI based equipment

Tekskil Broadcast Products

Toll Free 877-TEKSKIL (835-7545)
 Visit our website at Tekskil.com

Toll Free Fax: 877-576-8361
 Email: Team@tekstil.com